

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[2MBI75S-120](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

IGBT MODULE (S-Series)


■ Features

- NPT-Technology
- Square SC SOA at $10 \times I_C$
- High Short Circuit Withstand-Capability
- Small Temperature Dependence of the Turn-Off Switching Loss
- Low Losses And Soft Switching

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

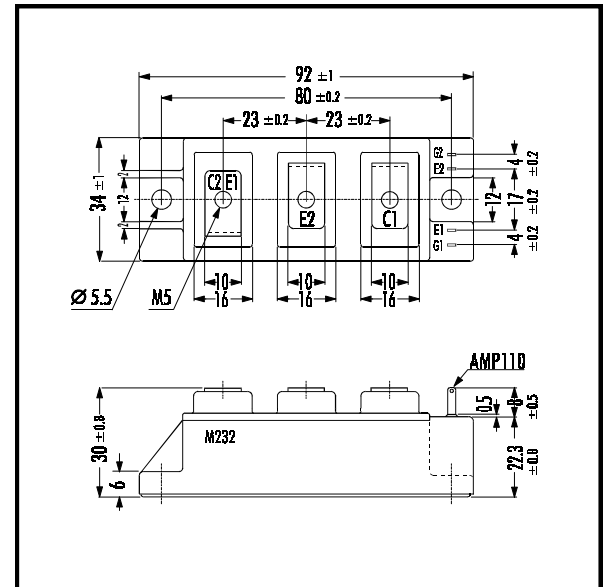

■ Maximum Ratings and Characteristics


• Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V_{CES}	1200	V
Gate -Emitter Voltage	V_{GES}	± 20	V
Collector Current	Continuous	I_C	100 / 75
	1ms	I_C PULSE	200 / 150
	Continuous	$-I_C$	75
	1ms	$-I_C$ PULSE	150
Max. Power Dissipation	P_C	600	W
Operating Temperature	T_j	+150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +125	$^\circ\text{C}$
Isolation Voltage *1	A.C. 1min.	V_{is}	2500
Screw Torque	Mounting *2	3.5	Nm
	Terminals *2	3.5	Nm

Note: 1*: All Terminals should be connected together when isolation test will be done.
2*: Recommendable Value; 2.5 ~ 3.5 Nm (M5)

• Electrical Characteristics (at $T_j=25^\circ\text{C}$)


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1200V$			1.0	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=75mA$	5.5	7.2	8.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=75A$		2.3	2.6	V
Input Capacitance	C_{ies}	$V_{GE}=0V$		9'000		pF
Output Capacitance	C_{oes}	$V_{CE}=10V$		1'875		pF
Reverse Transfer Capacitance	C_{res}	$f=1MHz$		1'650		pF
Turn-on Time	t_{ON}	$V_{CC}=600V$		0.35	1.2	μs
	$t_{r,x}$	$I_C=75A$		0.25	0.6	μs
	$t_{r,i}$	$V_{GE}=\pm 15V$		0.10		μs
Turn-off Time	t_{OFF}	$R_G=16\Omega$		0.45	1.0	μs
	t_f	Inductive Load		0.08	0.3	μs
						μs
Diode Forward On-Voltage	V_F	$I_F=75A$; $V_{GE}=0V$	$T_j=25^\circ\text{C}$	2.3	3.0	V
			$T_j=125^\circ\text{C}$	2.0		V
Reverse Recovery Time	t_{rr}	$I_F=75A$			350	ns















• Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(j-c)}$	IGBT			0.21	$^\circ\text{C/W}$
	$R_{th(j-c)}$	Diode			0.47	$^\circ\text{C/W}$
	$R_{th(c-f)}$	With Thermal Compound		0.05		$^\circ\text{C/W}$


■ Equivalent Circuit

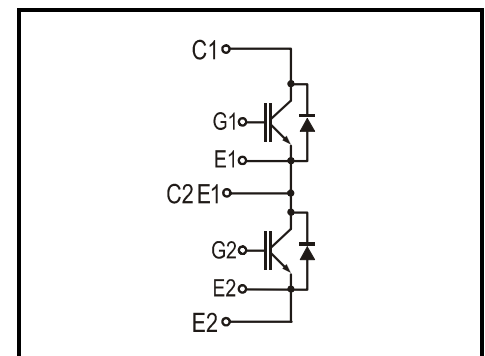

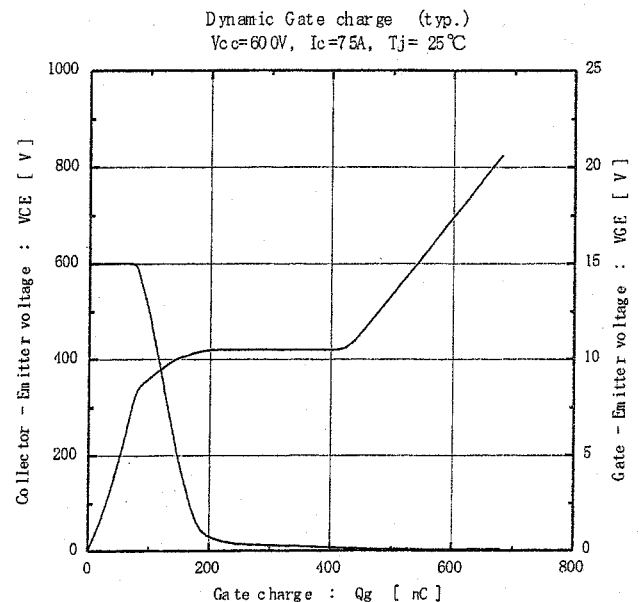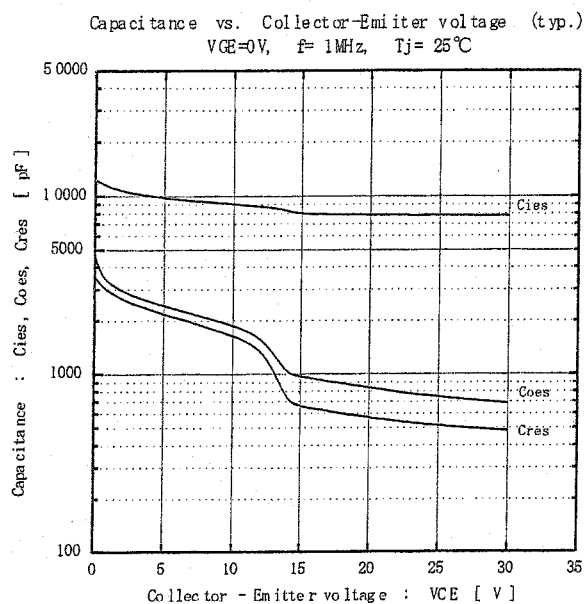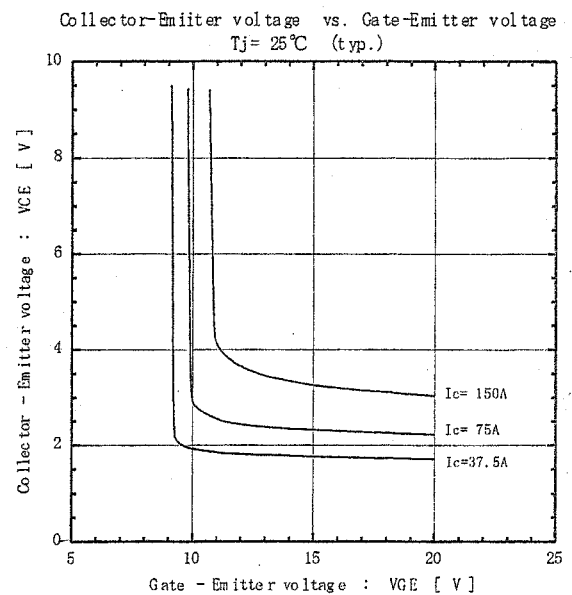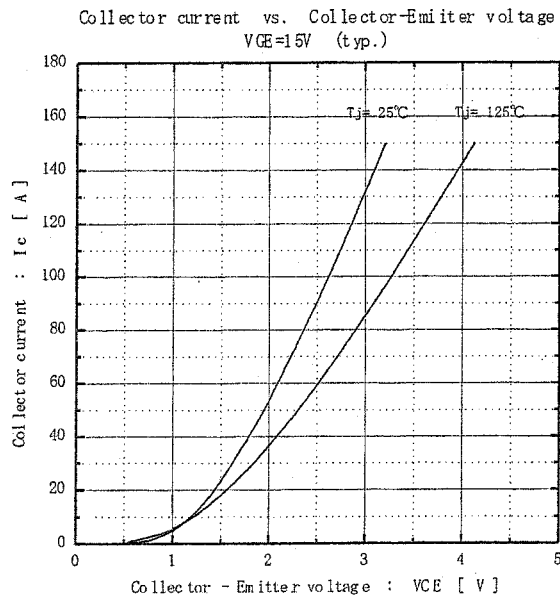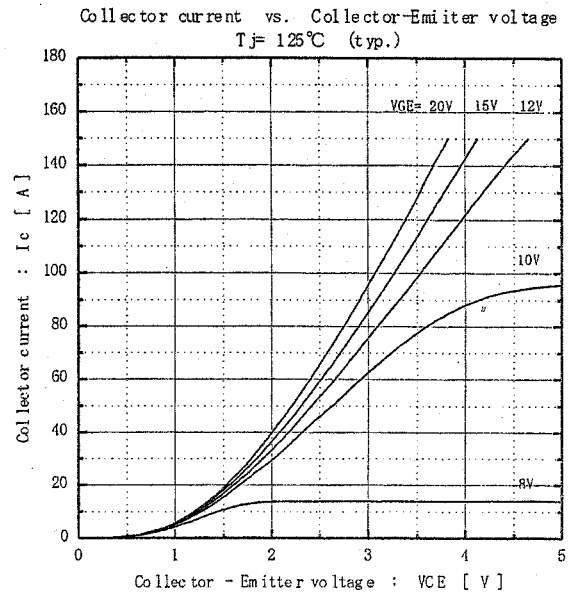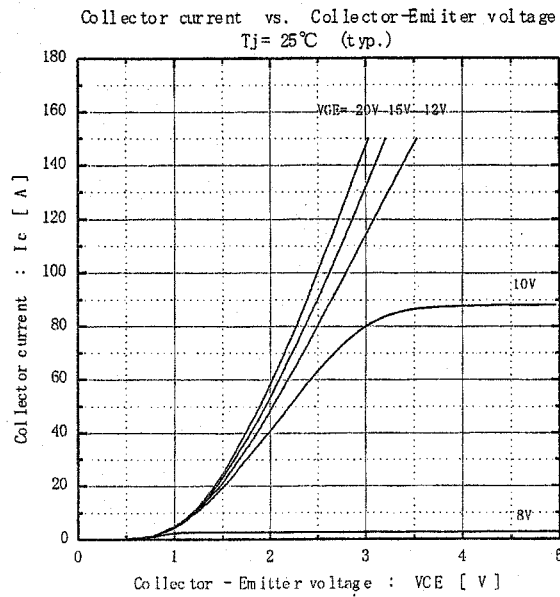

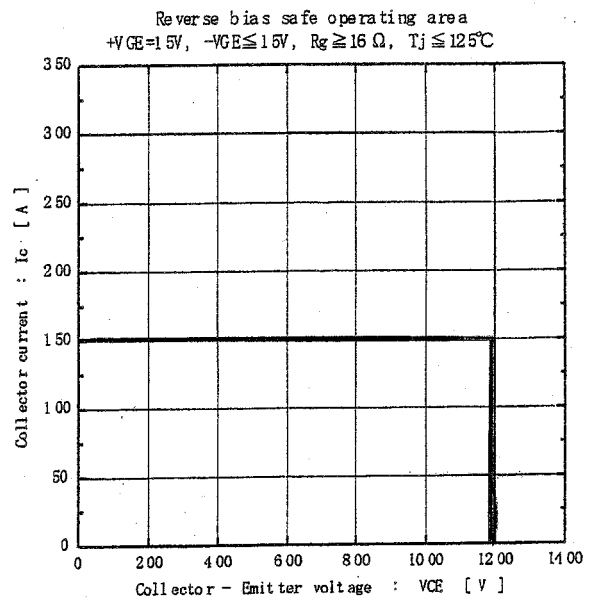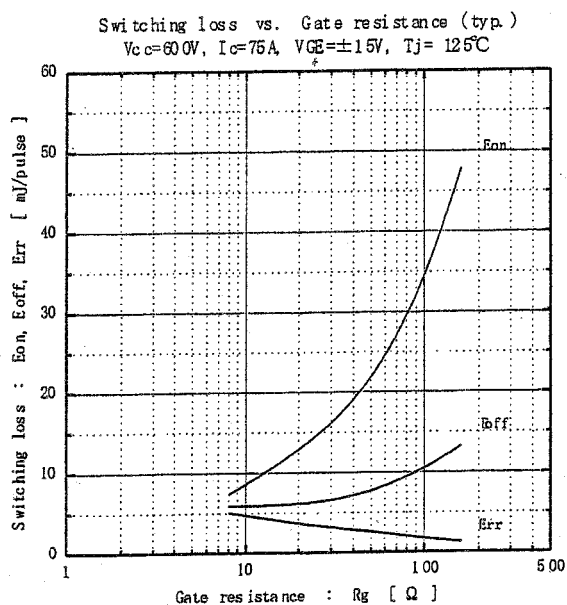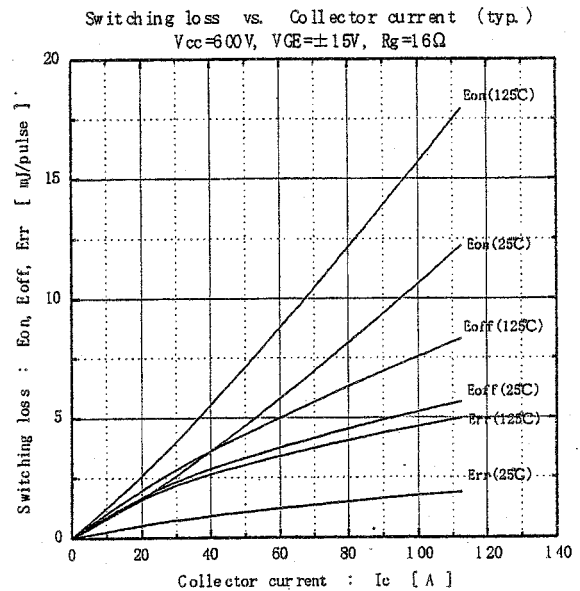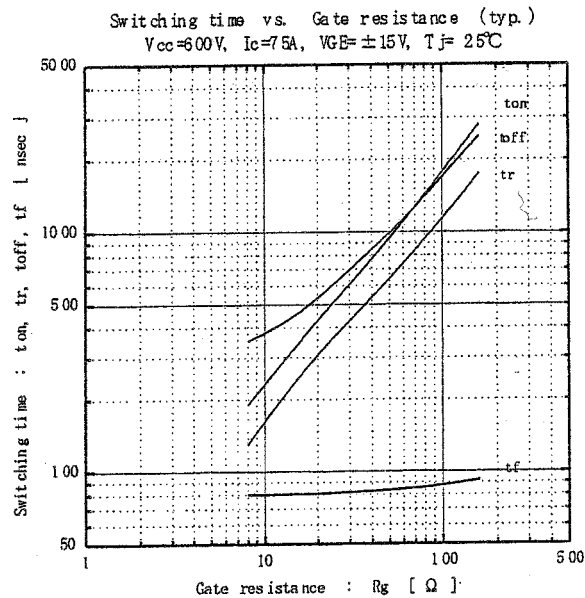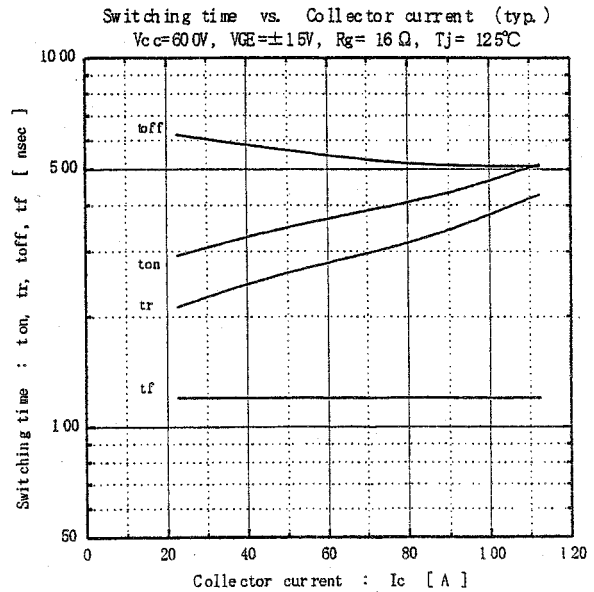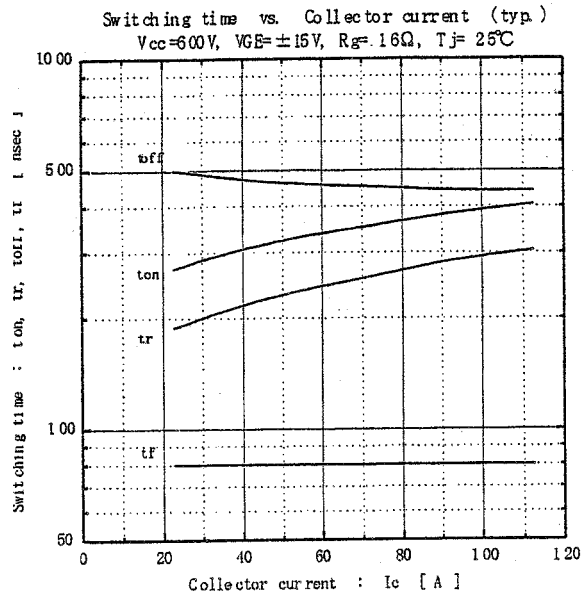


Forward current vs. Forward on voltage (typ.)

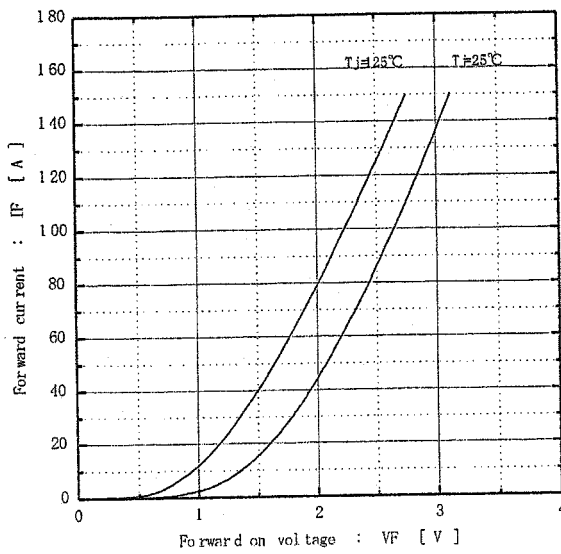


Reverse recovery characteristics (typ.)

Vcc=600V, VGE=±15V, Rg=16Ω

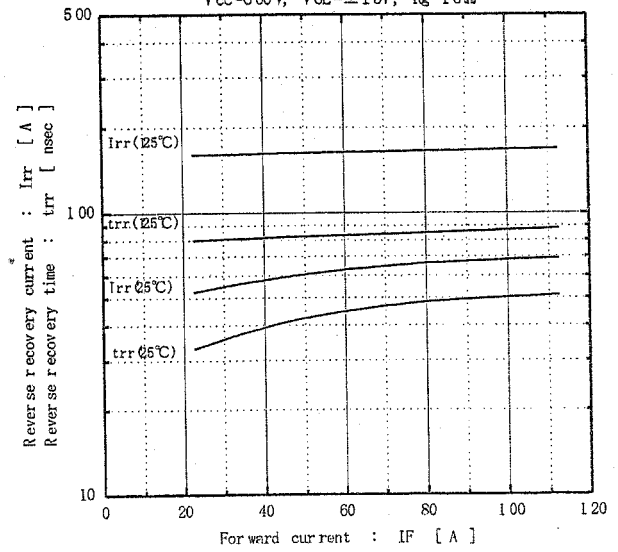

Transient thermal resistance

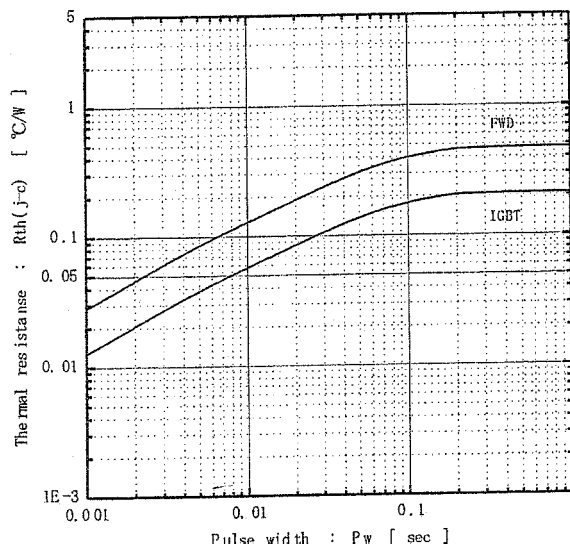

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[2MBI75S-120](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant